


Wringer® Plus

Humidity Control Plus Winter Heat Recovery



- 100% outdoor air conditioner and dehumidifier, 500 to 40,000 CFM
- Incorporation of the Wringer cycle reduces ventilation tons by 30%
- Free precooling
- Humidity control
- Space pressurization control
- Free reheat
- Either sensible or total heat recovery at up to 85% efficiency
- Solves design problems
 - Meets ASHRAE 62-1989 recommendation for outdoor air CFM, space and duct humidity
 - Eliminates IAQ problems including mold, mildew and fungus
 - Solves part load problems — standard equipment rarely controls humidity at part load
- Rugged construction
 - Two-inch double-wall construction
 - All welded stainless steel floor and drain pan
 - Heavy structural steel base
 - Internal spring isolated airfoil plenum fans
- Inexpensive to own
 - Efficient latent cooling conditions outdoor air for 30% less than conventional equipment
 - Permits the use of economical, high-efficiency terminal equipment, i.e. PTAC, VAV, RTU, unit ventilator
 - Lowest maintenance energy recovery device — no moving parts — no maintenance heat exchanger
 - Heavy-duty construction for long service life

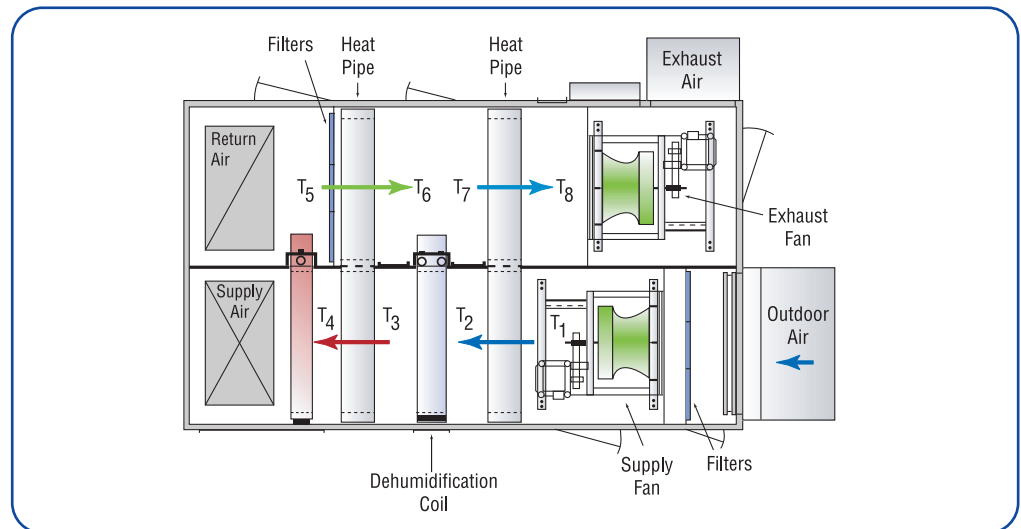